


APD 1425 M

Engine : Mitsubishi
Alternator : Stamford
Control System : P 732 control system

AKSA POWER DIESEL



ISO8528

This generator set has been designed to meet ISO 8528 regulation.



This generator set is available with CE certification.

2000/14/EC

Enclosed product is tested EU noise legislation 2000/14/EC

3 Phase Ratings, 50 Hz, PF 0,8

Voltage	Standby Rating (ESP)		Prime Rating (PRP)		
	kVA	kW	kVA	kW	Amp
400/230	1425,00	1140,00	1290,00	1032,00	1862,00

Standby Rating (ESP): Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. ESP is in accordance with ISO 8528. Overload is not allowed.

Prime Rating (PRP): Applicable for supplying power to varying electrical load for unlimited hours. PRP is in accordance with ISO 8528. 10 % overload capability is available for a period of 1 hour within 12-hour period of operation, in accordance with ISO 3046.

STANDARD SPECIFICATIONS

Heavy duty, water cooled diesel engine
Radiator with mechanical fan
Protective grille for fan and rotating parts
Electric starter and charge alternator
Starting battery (with lead acid) including rack and cables
Engine jacket cooling heater
Steel base frame and anti-vibration isolators
Base frame Fuel Tank
Flexible fuel connection hoses
Single bearing, class H alternator
Industrial exhaust silencer and steel belows supplied separately
Static battery charger
Manual for use and installation

OPTIONAL EQUIPMENTS

ENGINE

- Remote Radiator Cooling
- Fuel-Water Separator Filter
- Oil heater

ALTERNATOR

- Anti-Condensation Heater
- Over sized alternator
- Main line circuit breaker

CONTROL SYSTEM

- Automatic synchronising and power control system (multi gen-set Parallel)
- Parallel system with mains.
- Transition synchronization with mains
- Remote relay output
- Alarm output relays
- Remote communication with modem
- Earth fault, single set
- Charge Ammeter

OTHER ACCESSORIES

- Automatic or manual fuel filling system
- Electrical oil drain pump
- Low and high fuel level alarm
- Residential silencer
- Enclosure: weather protective or sound attenuated
- Duct adapter (on radiator)
- Inlet and outlet motorised louvers
- Inlet and outlet acoustic baffles
- Trailer
- Tool kit for maintenance
- 1500/3000 hours maintenance kit
- Supplied with oil and coolant - 30 °C
- Main Fuel Tank

TRANSFER SWITCH

-

APD 1425 M

Engine : Mitsubishi
Alternator : Stamford
Control System : P 732 control system

AKSA POWER DIESEL

DIESEL ENGINE SPECIFICATIONS

Manufacturer		Mitsubishi
Model		S12R-PTA
No. of Cylinders and Build		12-cylinder, V - Type
Aspiration and Cooling		Turbo Charged and After Cooled
Maximum Standby Power		1500 rpm
		1190 kW [1595HP]
Total Displacement	L	49,03
Bore and Stroke	mm	170 X 180
Compression Ratio		14:1
Rated Speed (rpm)	rpm	1500
Governor		Electronic
Oil Capacity	L	180,00
Coolant Capacity	L	335,00
Intake Air Flow	m ³ /min.	98,00
Radiator Cooling Air	m ³ /min.	1800
Exhaust Gas Temperatures	° C	258
Start System		24 V d.c.
Fuel Consumption	Load	%100 %75 %50
	L/h	261,00 195,00 132,00

ALTERNATOR SPECIFICATIONS

Make		Stamford
Model		PI 734 B
Frequency	Hz	50
Power	kVA	1400
Design		Brushless, 4 poles
Cos Phi		0,80
Phase		3
Voltage	V	400/230
Current	A	2020
Insulation Class		H
Stator		2 / 3 steps
Rotor		Single Bearing System, Flexible Disc
Excitation System		Electronic (AVR)

DIEMENSIONS AND WEIGHT


Open Type	Dry Weight	Lenght	Width	Height	Tank Capacity
	kg.	mm.	mm.	mm.	L
APD 1425 M	10000	4400	2120	2160	2000
Sound Attenuated Type	Dry Weight	Lenght	Width	Height	Tank Capacity
	kg.	mm.	mm.	mm.	L
AK 96	13000	7500	2300	2500	900

APD 1425 M

Engine : Mitsubishi
Alternator : Stamford
Control System : P 732 control system

AKSA POWER DIESEL

1 P 732 control system - Control System

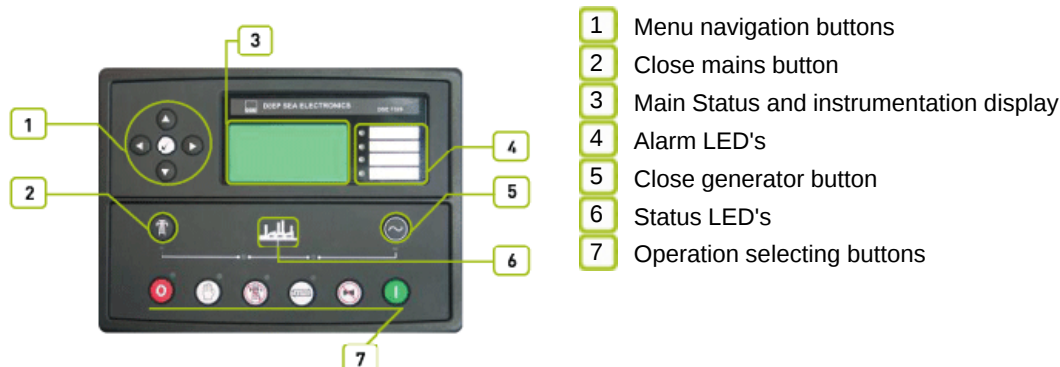

2 Devices

DSE, model 7320 Auto Mains Failure control module
Static battery charger 5A, 220/240 volt
Emergency stop push button and fuses for control circuits

3 Construction and Finish

Comonents installed in sheet steel enclosure. Phosphate chemical, pre-coating of steel provides corrosion resistant surface
Polyester composite powder topcoat forms high gloss and extremely durable finish
Lockable hinged panel door provides for easy component access

4 Installation

Control panel is mounted generating set baseframe on robust steel stand or power module.
Located at side of generating set with properly panel visibility.

5 Generating Set Control Unit

The DSE 7320 conrol module is a standard addition to our generator sets from 250kVA upwards and it have been designed to start and stop diesel andgas generating sets that include electronic and non electronic engines. The DSE 7320 includes the additional capability of being able to monitor a mains (utility) supply and is therefore suitable for controlling a standby generating set in conjunction with an automatic transfer switch.The DSE7320 also indicates operational status and fault conditions, automatically shutting down the generating set and indicating faults by means of its LCD display on the front panel.

Standard Specifications

Microprocessor controlled
132 x 64 pixel LCD display makes information easy to read
Front panel programming and also via PC software
Soft touch membrane keypad and five key menu navigation
Remote communications via RS232, RS485 and ethernet and SMS messaging
Event logging (50) showing date and time
Multiple date and time engine exercise mode and maintenance scheduler

APD 1425 M

Engine : Mitsubishi
Alternator : Stamford
Control System : P 732 control system

AKSA POWER DIESEL

Instruments

ENGINE
Engine speed
Oil pressure
Coolant temperature
Run time
Battery volts
Engine maintenance due
GENERATOR
Voltage (L-L, L-N)
Current (L1-L2-L3)
Frequency
Earth current
kW
Pf
kVAh
kWh, kVAh, kVAh
Phase sequence
MAINS
Voltage (L-L, L-N)
Frequency

Protection Circuits

WARNING
Charge failure
Battery under voltage
Fail to stop
Low fuel level (opt.)
kW over load
Negative phase sequence
PRE-ALARMS
Low oil pressure
High engine temperature
Low engine temperature
Over /Under speed
Under/over generator
frequency
Under/over generator
voltage
ECU warning
SHUT DOWNS
Fail to start
Emergency stop
Low oil pressure
High engine temperature
Low coolant level
Over /Under speed
Under/over generator
frequency
Under/over generator voltage
Oil pressure sensor open
Phase rotation
ELECTRICAL TRIP
Earth fault
kW over load
Generator over current
Negative phase sequence

Options

High oil temperature shut down
Low fuel level shut down
Low fuel level alarm
High fuel level alarm
EXPANSION MODULES
Editional LED module (2548)
Expansion relay module (2157)
Expansion input module (2130)

Standards

Electrical Safety / EMC compatibility
BS EN 60950 Electrical business equipment
BS EN 61000-6-2 EMC immunity standard
BS EN 61000-6-4 EMC emission standard

Static Battery Charger


Battery charger is manufactured with switching-mode and SMD technology and it has high efficiency. Battery charger models' output V-I characteristic is very close to square and output is 5 amper, 24 volt DC. Input 198 - 260 volt AC. 2405 has fully output short circuit protection and it can be used as a current source. 2405 charger has high efficiency, long life, low failure rate, light weight and low heat radiated in accordance with linear alternatives. The charger is fitted with a protection diode across the output. Charge fail output is available. Connect charge fail relay coil between positive output and CF output.

APD 1425 M

Engine : Mitsubishi
Alternator : Stamford
Control System : P 732 control system

AKSA POWER DIESEL

AK 96 - Canopy

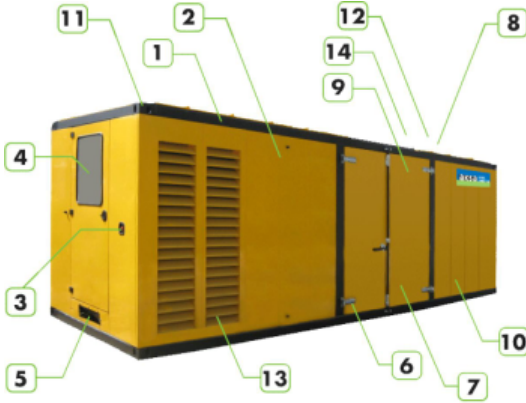

- 1 Çelik profil ve sac ile imal tahtiyec karkas yap
- 2 Çelik sac dan imal paneller ile kabin olu umu
- 3 Acil durdurma butonu
- 4 Kontrol panosu arka tarafta aseye montajl
- 5 Kablo k k l e arkadan veya alttan
- 6 Korozyona dayan k l kilit ve mente l eler
- 7 Yak bo l altma motor azerinde vana ile
- 8 Egzoz sistemi kabin iinde, gizli
- 9 Her iki tarafta bak m e kolayla t r an kilitlenebilir geni l kap lar
- 10 Yak t deposu kabinin 1/4 n taraf nda, ayr b kilitlenebilir kap e ile ula l l r
- 11 Kald rma ve ta l r ma noktas e kabin azerinde, konteyn r mapas e ekinde
- 12 Radyat r su dolumu iin kapak
- 13 Ses yal t m malzemeleri
- 14 Tavana k k l i in basmak merdiven

Introduction

Sound-attenuated and Weather-protective Enclosures Sound-attenuated and weather protective enclosures for generating sets from Aksa, meet event the sound requirements and provide optimum protection from inclement weather and development by our specialist acoustic engineers. Our modular designed sound insulated canopies provide ease of access for servicing and general maintenance and interchangeable components permitting on-site repair. Enclosures are designed to optimize genset cooling performance, providing you with confidence that genset ratings and ambient capability.

Standard Specifications

Compact footprint, low profile design.
Enclosure, generator set, exhaust system and fuel tank are pre-ssembled, pre-integrated and shipped as one package
Body made from steel components treated with polyester powder coating
Fire retardant foam insulation
Easy access to all service points
Exhaust system inside canopy
Large doors on each side
Control panel viewing window in a lockable access door
Emergency stop push button mounted on enclosure exterior
Cooling fan and battery charging alternator fully guarded
Fuel fill and battery can only be reached via lockable access doors.
Lifting points on the top of canopy and base frame
Customer options available to meet your applications needs.
Aksa makes its generating sets' noise level tests in accordance with directive 2000/14/EC validation of the noise level test has been approved by the notified body Szutest

Width	mm.	2300
Lenght	mm.	7500
Height	mm.	2500
Fuel Tank Capacity		900